


Auto EVA 12

Automated evaporation system



Auto EVA 12 is a nitrogen blow-down evaporation system that provides automated evaporation of up to 12 samples in parallel with end-point detection. The system adopts the vortex airflow technology, which can rapidly and gently evaporate the samples in parallel. Equipped with end-point detection sensor, the system can automatically detect the endpoint, which can efficiently concentrate up to your predefined residual volume with either 0.5 mL or 1.0 mL end-point stems.

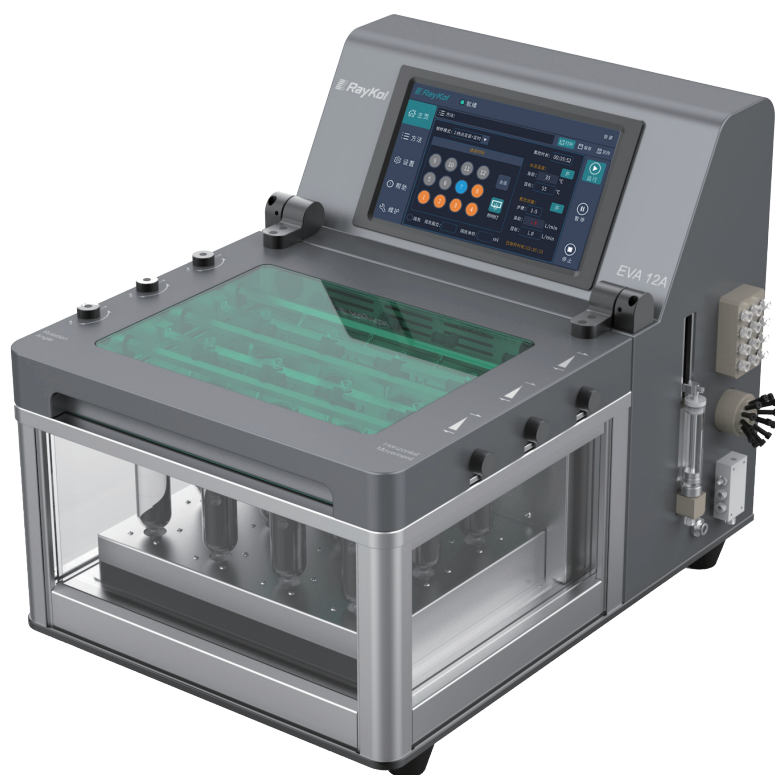

Rapid Evaporation

Fully Automated


Reliable and Efficient

Efficient & Reliable

- Uniform gentle heating combine with vortex airflow technology, the system provide rapid and gentle evaporation for sample in parallel. Each row of nozzles can be controlled individually. Airflow is adjustable, flow rate can be set in a gradient according to the decreasing sample volume.

Automated Evaporation Completion


- With end-point sensor technology, the system can automatically detect the endpoint, which can efficiently concentrate up to your predefined volume to 0.5 mL or 1.0 mL.

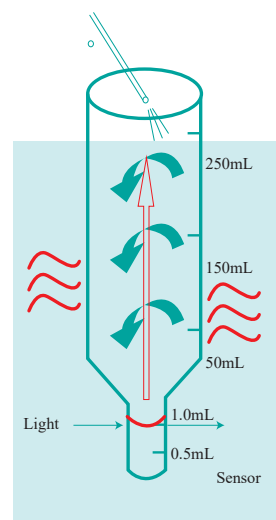

End-point Sensor


Unique Automatic Rinsing Design

- Auto EVA 12 equipped the unique “sprinkler” automatic rinsing function to improve the recovery. It is often necessary to rinse the sample bottle halfway or at the end point of sample concentration. EVA12 automatic rinsing mode is better than without rinsing or manual rinsing, the recovery rate can be increased by 10-15%.

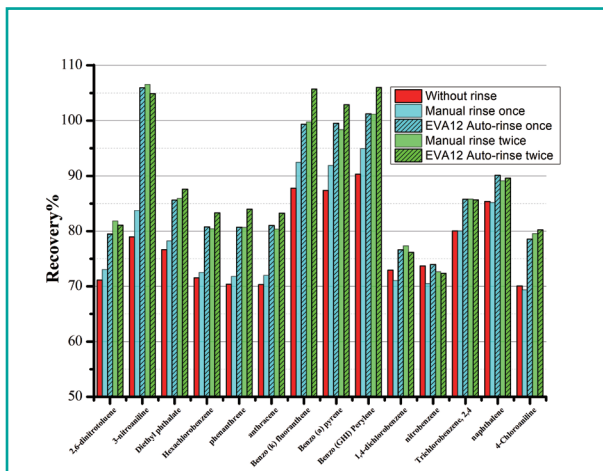

Flexible

- The nozzles can be adjustable for left and right angles blowing, which is compatible with a variety of sample tubes. It is commonly used for 60mL and 250mL tubes.
- The system can automatically supply and drain water, quickly exchange the sample in the water bath.



60mL Tube



250mL Tube

Good Visibility

- Three-sided transparent glass windows with internal light greatly improves the visibility of the process of nitrogen blowing and concentration.



Easy- use software Interface

- With one touch screen airflow rate and temperature operation with individual tube control.

Wide ranges of application

Liquid sample concentration fields of Food, water, Environment, Agriculture Pharmaceutical industry, Life science research.



Dedicated to be a leading supplier in smart laboratory



RayKol Group

Add: 5-6F, No.176 Xinfeng Road, HuizhiZone, Torch High-tech Zone, Xiamen, China

Tel:+86-0592-5800190

Mail: info@raykolgroup.com

www.raykolgroup.com